

All models


Oil grades

Differential **without** limited slip
approved oil grades

Hypoid gear oil SAE 90, 85W/90
Refer to MBNA Factory Approved
Service Products list

Differential **with** limited slip
and vehicles with 4MATIC
approved oil grades (note information plate on rear axle
housing)

Special hypoid gear oil SAE 90
Refer to MBNA Factory Approved
Service Products list

Special tools**Commercial tools**

Screwdriver insert 14 mm, 1/2 " square


obtain locally

Note: Vehicle should be horizontal when checking oil level.


- Remove oil filler plug.
- If a minimal amount of oil runs out or if the oil level is at lower edge of opening, oil level is correct.
- If not, add oil.

Install filler plug, and torque to 50 Nm.


- If oil loss is excessive, determine cause and repair on separate order

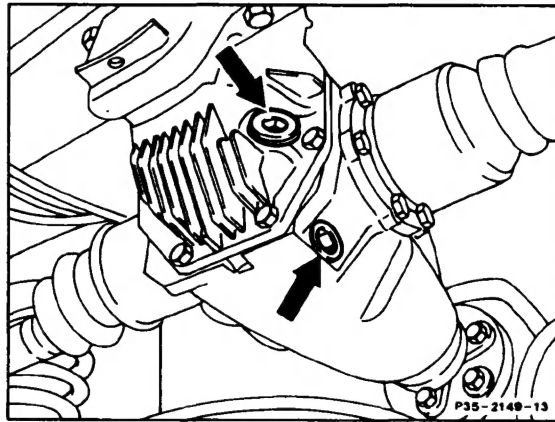


Rear axle centerpiece **with** side bearing covers
model 123 (up through 01.1981)

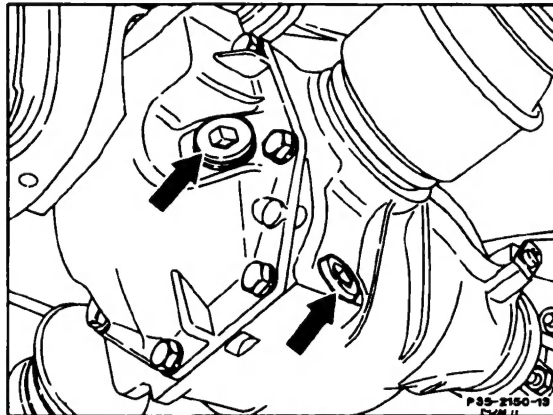


Rear axle centerpiece **without** side bearing covers
model 123 (from 02.1981) model 126.02/1 (from start of
production)

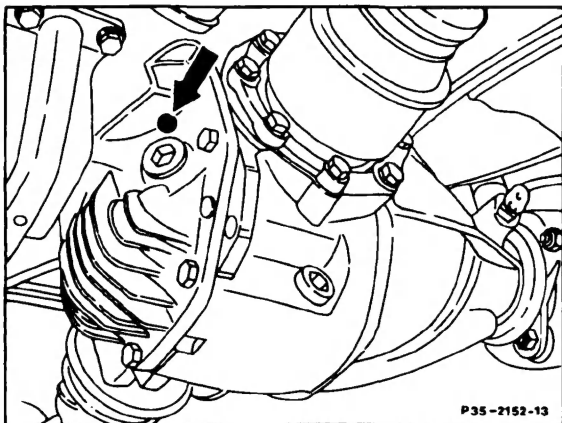


Model 107.025/045/048, 126.03/04
Differential **without** limited slip

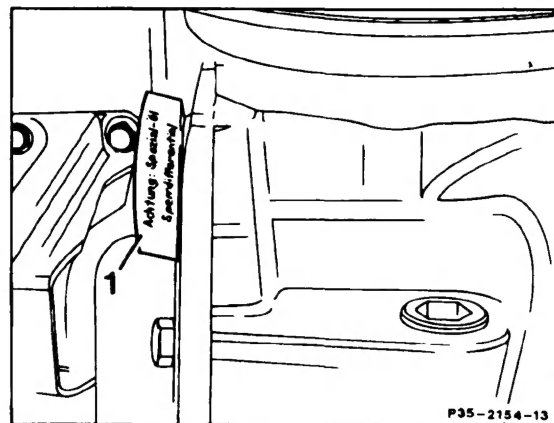


Model 126.04
Differential **with** limited slip
1 Information plate for limited slip differential

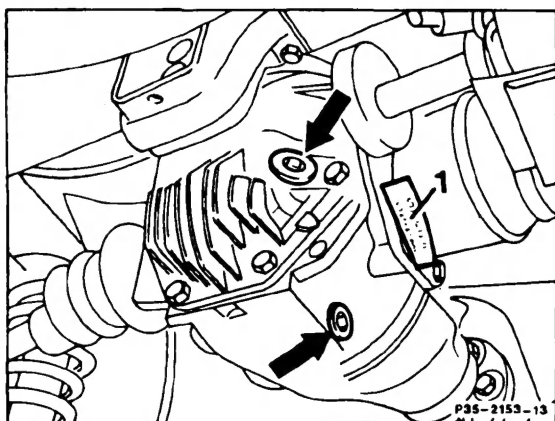


Model 107.025/045/048, 126.03
Differential **with** limited slip
1 Information plate for limited slip differential

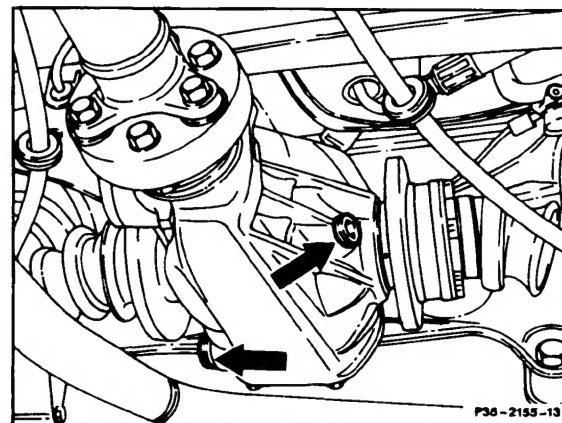

Model 124, 201

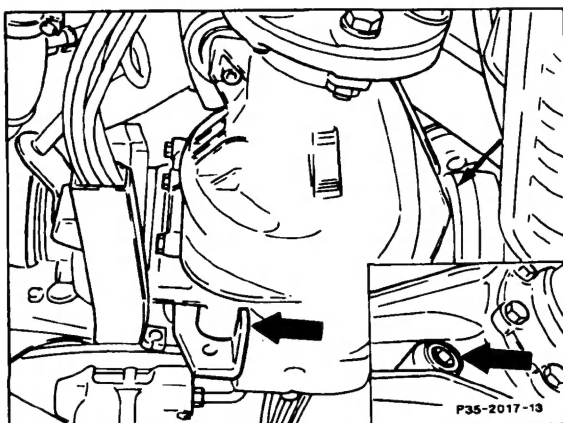

Model 129, 140

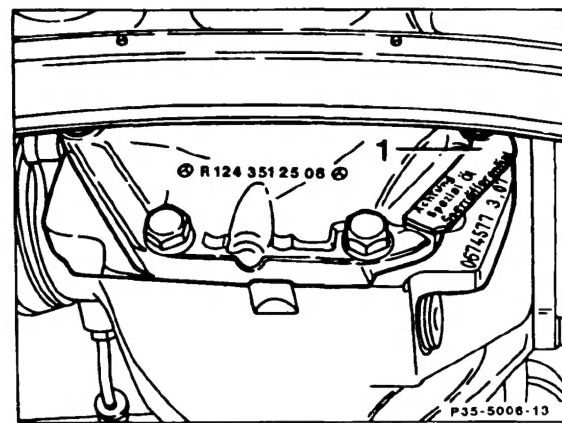

Vehicles with 4MATIC or ASD
1 Information plate for limited slip differential